



Stylish dashboard with adjustable steering.



Roof Ventilator for air Ventilation.



Luxurious and spacious cabin and 03 persons seating capacity.



Stylish Crystal lights.



Radial tyres of 7.50-16 and stud-piloted 06-hole steel disc .



Fuel tank of 100 liters capacity for long haulage in one fill.

AL-HAJ FAW MOTORS (PVT.) LTD.

Head Office/Plant: Main National Highway, Zulfiqarabad, Karachi.

Tel: (92-21) 34100335-9 Fax: (92-21) 34100922

Marketing & Sales Office: Plot No. M-11, 1031-A, Block-C, Street No. 6,

Paracha Chowk, Sher Shah Karachi. Tel: (92-21) 32569037-38 Fax: (92-21) 32587837

Website: www.alhajfaw.com

FAW Sadiqabad Motors
FFC Chowk, Machi Goth, Sadiqabad.
Tel: 068-5786660 - 760

FAW Mehmoodkot
Parco Road, Qasba Gujrat, Mehmoodkot.
Tel: 066-2290118 - 2001981

FAW Sher-e-Islam Motors
Vihari Chowk, Bhawalpur Bypass, Multan.
Tele: 061-4551148-4170

FAW Universal Motors
Chowk Al-Saeed, main jaranwala road,
Sagian bypass, Lahore.
Tel: 042-37700282

FAW Islamabad Motors
Cell : 0300-7968566

FAW Peshawar Motors
Ring Road Peshawar
Cell: 0313-9858802

Dealerships



A Powerful Combination

FAW TIGER

The Performance that ensures Profitability & Reliability

کم سی میں زیادہ طاقت و رانجن (120HP)

ڈیزل کا خرچ کم

ٹرپو چارجڈ انٹرکولر

300 ملی میٹر (12 انچ) کا پائیدار کچ

مضبوط فریم

کشادہ اور آرام دہ کیمین



Euro-II

SPECIFICATIONS

WEIGHTS وزن	GVW kg	9500
	CHASSIS WEIGHT kg	2700
	PAYLOAD kg	6800

ENGINE انجن	MODEL	CA4D32-12
	TYPE	Diesel , 4 Stroke, 4 Cylinder, Inline, Inter Cooler Turbo Charged, Water Cooled
	MAX. OUTPUT ps/rpm	120/3200
	MAX. TORQUE kgf.m/rpm	30/1800
	DISPLACEMENT cc	3200

PERFORMANCE کارکرد	MAX. SPEED km/hr	100
	GRADEABILITY %	34

TRANSMISSION ٹرانسمیشن	MODEL	CA5-48
	NO. OF GEARS	5+1
	RATIO	1st: 5.502 2nd: 2.882 3rd: 1.650 4th: 1.000 5th: 0.755 Rev: 5.118

CLUTCH کلچ	TYPE	Dry type, single plate, diaphragm spring clutch, hydraulically controlled
	SIZE mm	300 (12 inches)

STEERING اسٹیرنگ	TYPE	POWER
------------------	------	-------

BRAKES برک	SERVICE	Dual Circuit Air Pressure Brake
	PARKING	Spring Energy Storage type
	EXHAUST	Exhaust Brake

AXLE ایکس	FRONT	Reverse Elliot "I" Section Beam (3500 kg)
	REAR	Banjo, Full Floating (6000 Kg)
	AXLE RATIO	6.167

SUSPENSION سسپنشن	FRONT	Leaf Spring
	REAR	Leaf Spring

FRAME فریم		Ladder Type
------------	--	-------------

TYRE ٹائر	SIZE	7.50 R 16 LT
	TYRE	Radial
	QUANTITY	7


FUEL TANK فیول ٹینک	CAPACITY Litre	100
---------------------	----------------	-----



Multi Purpose SUPER STRUCTURE ON FAW FIGER




Garbage Compactor




Water Bowser




Dump Truck




Refrigerated Van



Arm Roll Truck



Flat Bed Truck




Cargo Truck



Crane Mounted Truck

Dimensions	WHEEL BASE (mm)	WB	3860
	OVERALL LENGTH (mm)	OL	6901
	OVERALL WIDTH (mm)	OW	2100
	OVERALL HEIGHT (mm)	OH	2305
	REAR BODY LENGTH (mm)	RBL	5110
	GROUND CLEARANCE (mm)		255

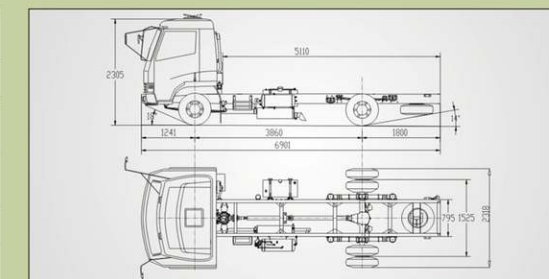

Note: Company reserves the right to change the specifications and design for the improvement of the product at any time.